
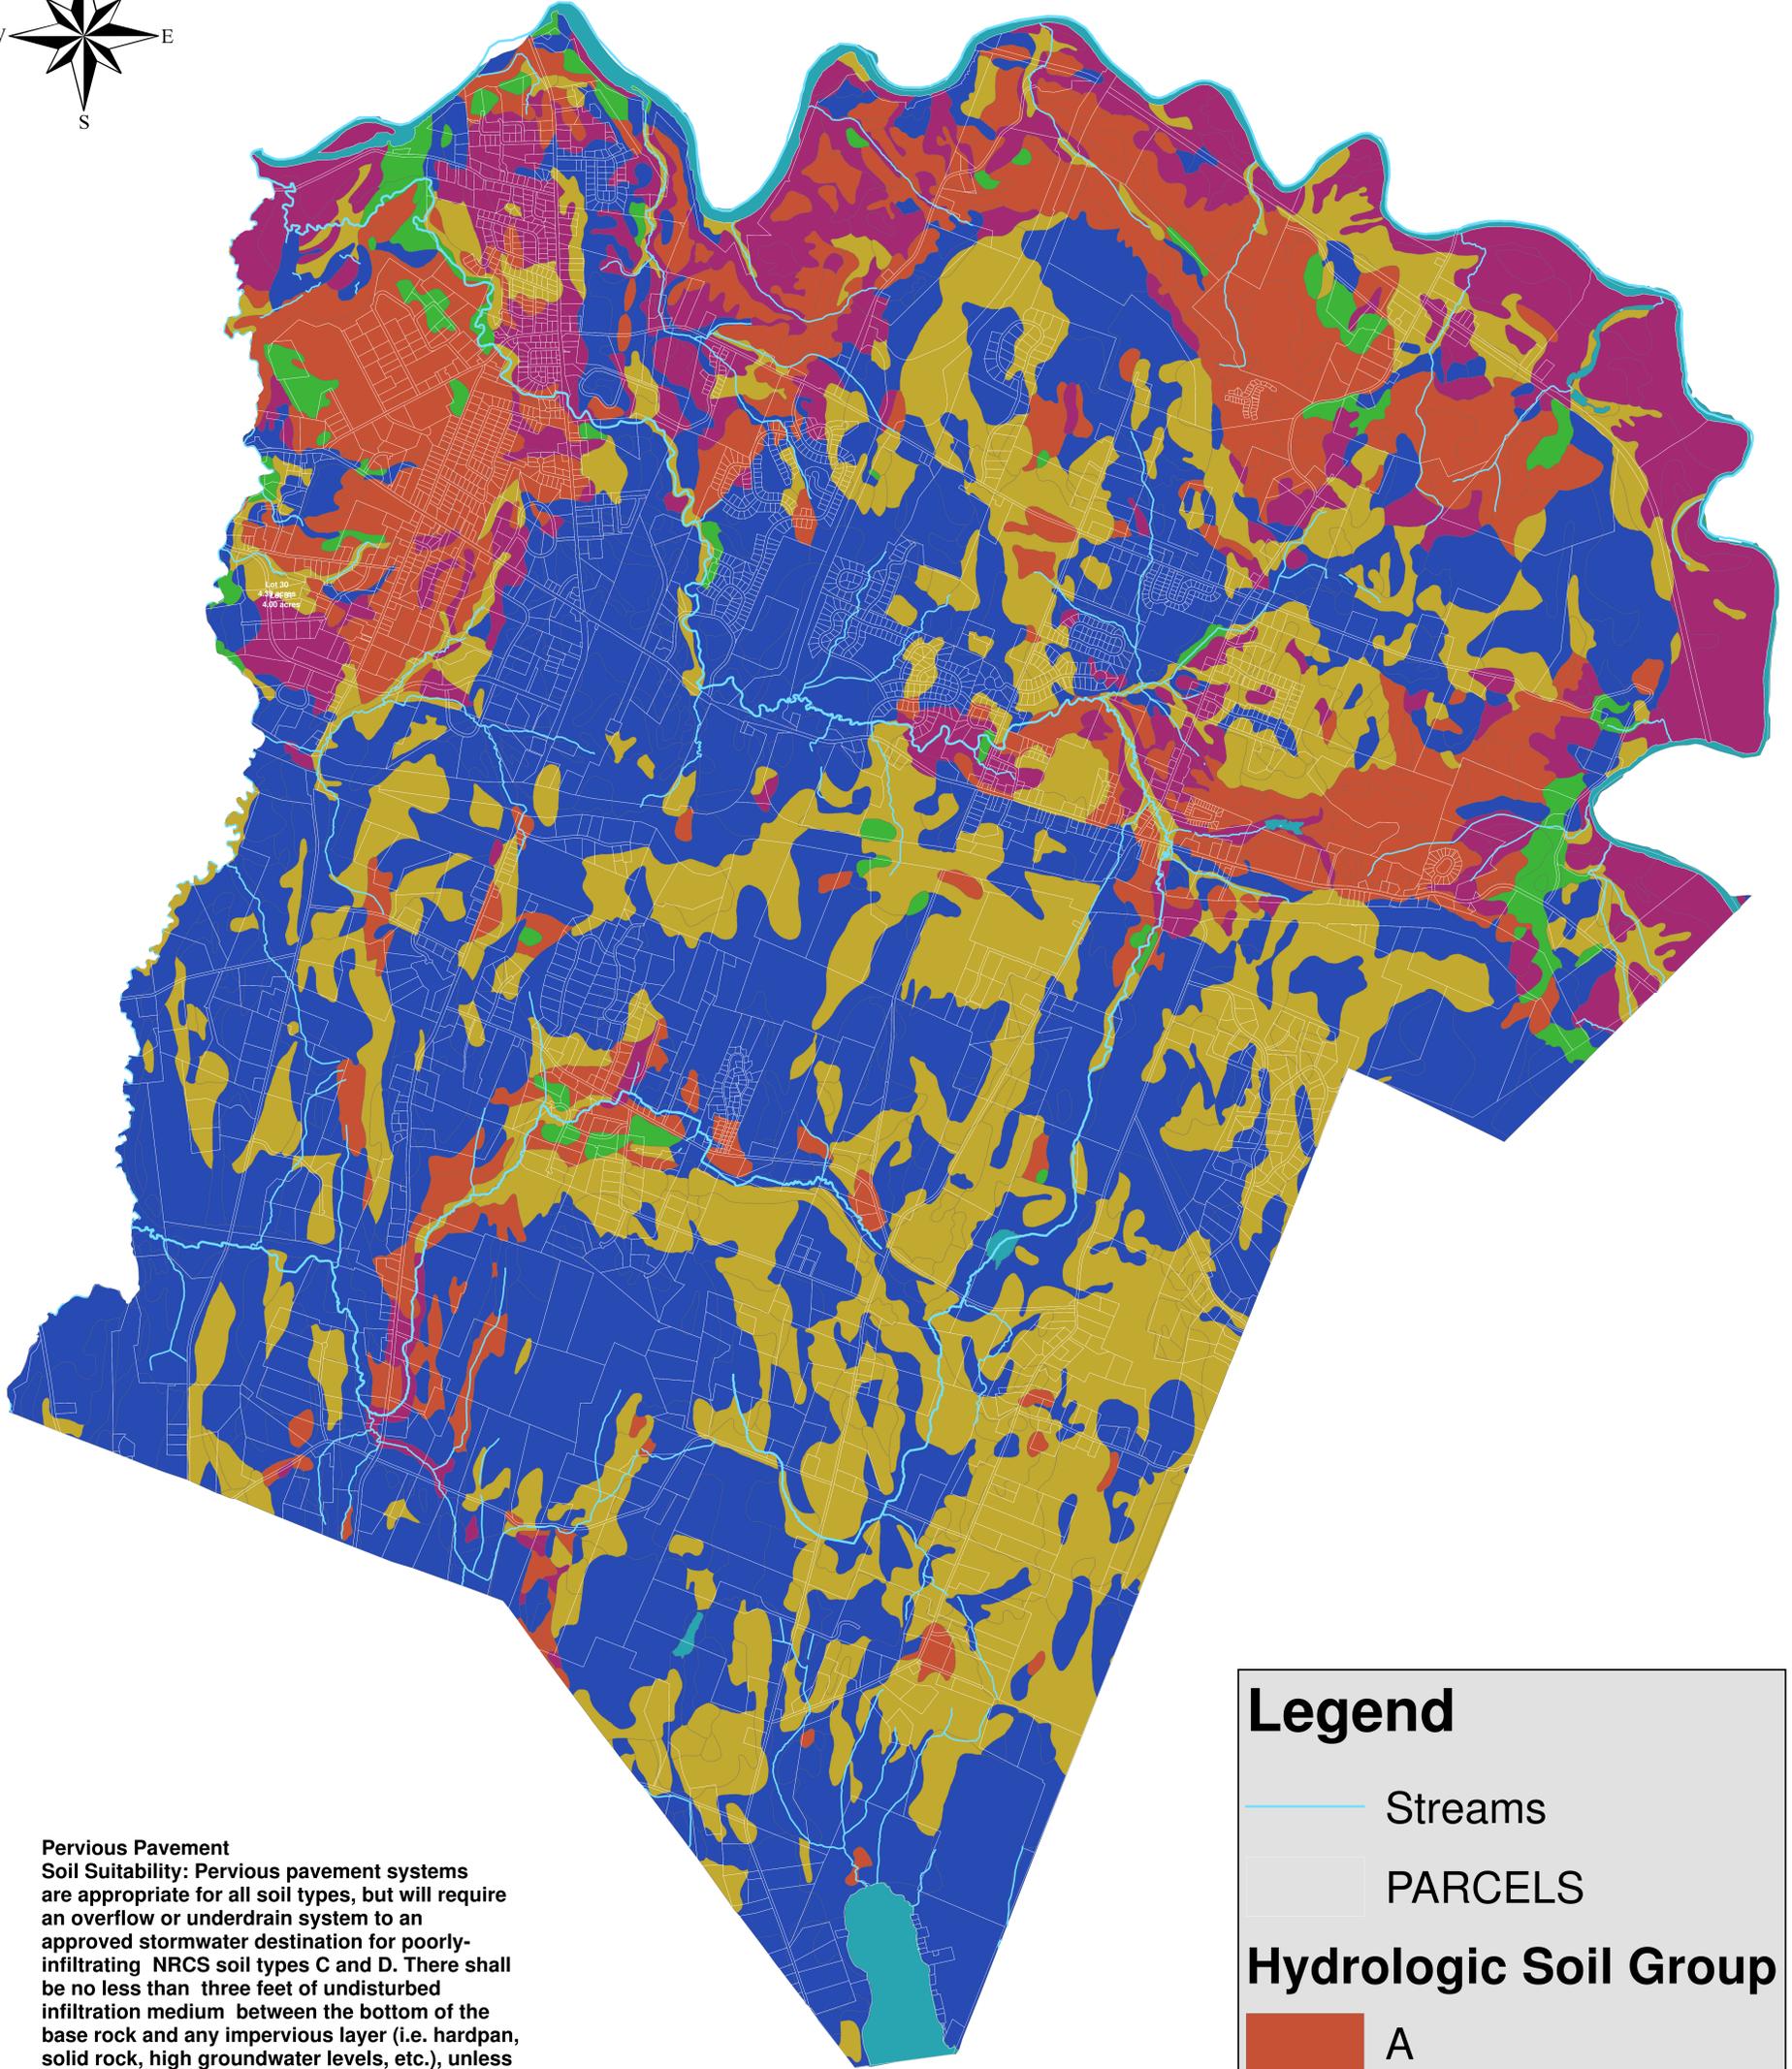


NRCS Hydrologic Soil Groups

0 1,700 3,400 6,800 10,200 13,600 Feet



Pervious Pavement
Soil Suitability: Pervious pavement systems are appropriate for all soil types, but will require an overflow or underdrain system to an approved stormwater destination for poorly-infiltrating NRCS soil types C and D. There shall be no less than three feet of undisturbed infiltration medium between the bottom of the base rock and any impervious layer (i.e. hardpan, solid rock, high groundwater levels, etc.), unless an underdrain system is used.

Legend

Streams

PARCELS

Hydrologic Soil Group

A

B

C

D

not rated

water

NRCS Hydrologic Soil Groups

Group	Description
A	Soils with low runoff potential, having high infiltration rates even when thoroughly wetted.
B	Soils having moderate infiltration rates even when thoroughly wetted.
C	Soils having slow infiltration rates even when thoroughly wetted.
D	Soils with high runoff potential, having very slow infiltration rates even when thoroughly wetted.